

Plug-In Attenuator/Switch

TFAS-2

50Ω Bi-Phase 10 to 1000 MHz



CASE STYLE: B02
PRICE: \$20.20 ea. QTY. (1-9)


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Control Current	30mA

Pin Connections

INPUT	1
OUTPUT	4
CONTROL	2
GROUND	3
CASE GROUND	3

Outline Drawing

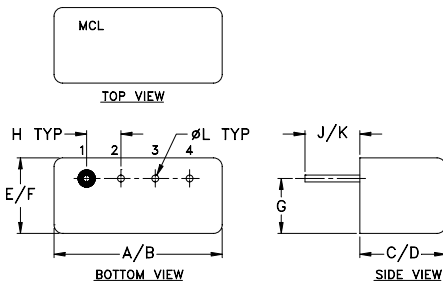

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.480	.500	.240	.255	.210	.230
12.19	12.70	6.10	6.48	5.33	5.84
G	H	J	K	L	wt
.16	.100	.14	.20	.020	grams
4.06	2.54	3.56	5.08	0.51	1.9

Features

- wideband, 10 to 1000 MHz
- high in-out isolation

Applications

- bi-phase modulator


Attenuator/Switch Electrical Specifications

FREQUENCY (MHz)	INSERTION LOSS (dB) ±20 mA	MAX. INPUT PWR (dBm) ±20 mA	IN-OUT ISOLATION (dB) 0 mA						BI-PHASE X̄ (±20 mA) Typ.									
			Mid-Band m		Total Range		L		M		U		Δ AMP (dB)		Phase (deg.) deviation from 180°			
IN f _L -f _U	CON		Typ.	Max.	Typ.	Max.	1 dB compr.	no damage	Typ.	Min.	Typ.	Min.	Typ.	Min.	m	Total Range	m	Total Range
10-1000	DC-0.5		3.7	4.5	5.0	8.0	17*	25	50	30	42	20	31	20	0.1	0.2	2.0	3.0


L = low range [f_L to 10 f_L] M = mid range [10 f_L to f_U/2] U = upper range [f_U/2 to f_U] m = [2 f_L to f_U/2]
* 13 dBm from 10-500 MHz.

Performance specifications apply for input power up to 10 dB below stated 1 dB compression.

suggested control port biasing configuration






electrical schematic



Typical Performance Data

Freq. (MHz)	I. Loss (dB) at 20mA	±Control Δ AMP (dB)	20mA Δ Phase (deg.)	Isolation (dB)		Input R. Loss (dB)	Control Current (mA)	Attenuation (dB)			Phase Δ ref at 15mA Ctrl deg.			Input VSWR				
				(in-out)	(in-con)			10 MHz	500 MHz	1000 MHz	10 MHz	500 MHz	1000 MHz	10 MHz	500 MHz	1000 MHz		
X̄	σ	X̄	X̄	X̄	X̄	X̄												
10.0	3.34	0.009	0.00	180.0	69	47	11.4	0.0000	51.3	24.7	27.2	76.7	40.6	0.5	3.3	2.3	4.2	
11.4	3.24	0.006	0.01	180.0	67	46	11.6	0.0001	40.8	22.0	24.7	67.8	31.3	-6.7	3.2	2.2	4.0	
16.1	3.17	0.004	0.01	180.1	64	43	12.2	0.0002	35.5	20.5	23.4	61.3	25.4	-10.4	3.2	2.2	3.8	
23.2	3.18	0.003	0.00	180.1	59	40	12.5	0.0003	32.1	19.5	22.5	59.5	21.4	-12.8	3.1	2.1	3.7	
46.5	3.35	0.002	0.01	180.3	54	34	12.5	0.0008	28.6	18.4	21.4	55.8	17.3	-14.7	3.0	2.0	3.6	
65.8	3.24	0.002	0.01	180.5	51	31	12.4	0.0012	25.7	17.1	20.1	53.7	14.1	-15.8	2.9	1.9	3.4	
93.1	3.19	0.030	0.01	180.7	48	28	12.4	0.0019	22.8	15.7	18.6	51.0	10.9	-16.0	2.7	1.9	3.2	
100.2	3.34	0.003	0.01	180.7	47	28	12.4	0.0029	20.2	14.2	17.0	47.8	8.6	-15.1	2.6	1.7	3.1	
131.8	3.36	0.004	0.01	180.9	45	25	12.4	0.0040	17.8	12.7	15.3	45.1	6.8	-13.6	2.4	1.6	2.9	
186.6	3.36	0.005	0.02	181.3	42	23	12.3	0.0074	14.6	10.4	12.9	40.1	4.7	-10.7	2.1	1.5	2.7	
373.8	3.75	0.008	0.02	182.1	36	20	11.4	0.0110	12.7	9.1	11.5	36.8	3.7	-8.7	1.9	1.4	2.6	
500.8	3.93	0.015	0.03	182.5	34	21	11.3	0.0159	11.1	8.0	10.4	33.2	2.8	-7.2	1.7	1.4	2.6	
529.1	4.06	0.018	0.04	182.5	33	21	11.2	0.0221	9.7	7.0	9.5	29.5	2.2	-5.3	1.5	1.4	2.5	
748.8	4.72	0.055	0.10	182.6	31	19	10.7	0.0301	8.5	6.3	8.8	25.9	1.7	-4.3	1.3	1.4	2.6	
791.0	5.13	0.050	0.15	182.8	31	18	10.3	0.0416	7.4	5.8	8.3	22.4	1.0	-3.4	1.2	1.5	2.6	
820.5	5.21	0.052	0.15	182.4	32	18	10.1	0.0753	5.9	5.1	7.6	16.2	0.7	-2.1	1.2	1.6	2.6	
899.0	5.75	0.063	0.20	182.4	31	15	9.5	0.1640	4.7	4.5	7.0	9.2	0.2	-1.4	1.4	1.8	2.7	
932.5	5.97	0.089	0.27	182.0	31	15	9.3	0.3543	4.0	4.2	6.7	5.0	0.0	-0.8	1.6	1.9	2.7	
967.2	5.85	0.077	0.24	181.8	31	13	9.1	1.2309	3.6	4.0	6.5	1.7	-0.1	-0.5	1.8	2.0	2.7	
1000.0	6.41	0.111	0.38	181.4	31	13	8.8	15.1064	3.4	3.8	6.3	0.0	0.0	-0.1	1.9	2.0	2.7	

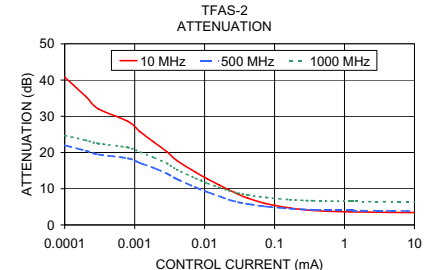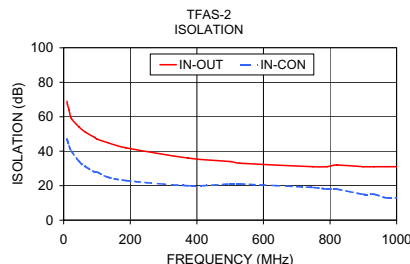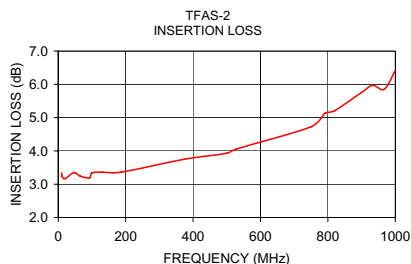

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. OR
M96904
TFAS-2
WP/TD/CP
070305