

Plug-In

Power Splitter/Combiner

PSC-2-1+
PSC-2-1

2 Way-0° 50Ω 0.1 to 400 MHz




Maximum Ratings

| | |
|-----------------------------|----------------|
| Operating Temperature | -55°C to 100°C |
| Storage Temperature | -55°C to 100°C |
| Power Input (as a splitter) | 1W max. |
| Internal Dissipation | 0.125W max. |

Pin Connections

| | |
|-------------|-----------|
| SUM PORT | 1 |
| PORT 1 | 5 |
| PORT 2 | 6 |
| GROUND | 2,3,4,7,8 |
| CASE GROUND | 2,3,4,7,8 |

Outline Drawing

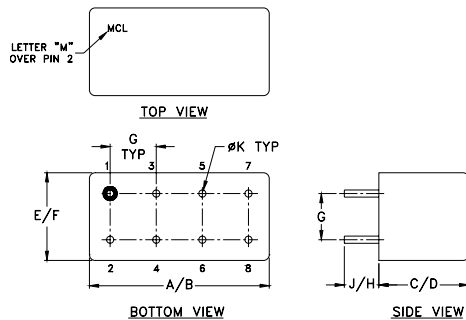

Outline Dimensions (inch/mm)

| | | | | | |
|-------|-------|------|-------|------|-------|
| A | B | C | D | E | F |
| .770 | .800 | .385 | .400 | .370 | .400 |
| 19.56 | 20.32 | 9.78 | 10.16 | 9.40 | 10.16 |
| G | H | J | K | | wt |
| .200 | .20 | .14 | .031 | | grams |
| 5.08 | 5.08 | 3.56 | 0.79 | | 5.2 |

Features

- wideband, 0.1 to 400 MHz
- low insertion loss, 0.4 dB typ.
- rugged welded construction

Applications

- VHF/UHF
- federal & defense communications

CASE STYLE: A01

PRICE: \$14.20 ea. QTY. (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.




Splitter Electrical Specifications

| FREQ. RANGE (MHz) | ISOLATION (dB) | | | | | | INSERTION LOSS (dB) ABOVE 3.0 dB | | | | | | PHASE UNBALANCE (Degrees) | | | AMPLITUDE UNBALANCE (dB) | | |
|--------------------------------|----------------|-----|------|-----|------|-----|----------------------------------|------|------|------|------|------|---------------------------|------|------|--------------------------|------|------|
| | L | | M | | U | | L | | M | | U | | L | M | U | L | M | U |
| | Typ. | Min | Typ. | Min | Typ. | Min | Typ. | Max. | Typ. | Max. | Typ. | Max. | Max. | Max. | Max. | Max. | Max. | Max. |
| f _L -f _U | | | | | | | | | | | | | | | | | | |
| 0.1-400 | 20 | 15 | 25 | 20 | 25 | 20 | 0.2 | 0.6 | 0.4 | 0.75 | 0.6 | 1.0 | 2.0 | 3.0 | 4.0 | 0.15 | 0.2 | 0.3 |


L = low range [f_L to 10 f_L] M = mid range [10 f_L to f_U/2] U = upper range [f_U/2 to f_U]

Typical Performance Data

| Frequency (MHz) | Insertion Loss (dB) | | Amplitude Unbalance (dB) | Isolation (dB) | Phase Unbalance (deg.) | VSWR S | VSWR 1 | VSWR 2 |
|-----------------|---------------------|------|--------------------------|----------------|------------------------|--------|--------|--------|
| | S-1 | S-2 | | | | | | |
| 0.10 | 3.23 | 3.23 | 0.00 | 24.82 | 0.01 | 1.16 | 1.37 | 1.37 |
| 5.00 | 3.14 | 3.14 | 0.00 | 35.64 | 0.01 | 1.10 | 1.11 | 1.11 |
| 20.00 | 3.18 | 3.17 | 0.00 | 35.33 | 0.03 | 1.11 | 1.10 | 1.10 |
| 40.00 | 3.18 | 3.18 | 0.00 | 34.39 | 0.02 | 1.12 | 1.10 | 1.10 |
| 60.00 | 3.22 | 3.22 | 0.00 | 33.16 | 0.02 | 1.12 | 1.09 | 1.09 |
| 80.00 | 3.24 | 3.24 | 0.00 | 31.85 | 0.04 | 1.13 | 1.09 | 1.09 |
| 100.00 | 3.24 | 3.24 | 0.00 | 30.68 | 0.05 | 1.13 | 1.09 | 1.09 |
| 150.00 | 3.28 | 3.27 | 0.00 | 28.37 | 0.04 | 1.14 | 1.08 | 1.08 |
| 175.00 | 3.31 | 3.30 | 0.01 | 27.46 | 0.07 | 1.14 | 1.07 | 1.07 |
| 200.00 | 3.32 | 3.31 | 0.01 | 26.72 | 0.05 | 1.15 | 1.07 | 1.07 |
| 225.00 | 3.32 | 3.31 | 0.01 | 26.14 | 0.02 | 1.15 | 1.06 | 1.06 |
| 250.00 | 3.37 | 3.36 | 0.01 | 25.65 | 0.05 | 1.15 | 1.06 | 1.06 |
| 300.00 | 3.41 | 3.38 | 0.03 | 24.88 | 0.10 | 1.15 | 1.06 | 1.06 |
| 350.00 | 3.47 | 3.44 | 0.03 | 24.40 | 0.06 | 1.16 | 1.08 | 1.07 |
| 400.00 | 3.50 | 3.46 | 0.04 | 23.86 | 0.05 | 1.18 | 1.10 | 1.09 |

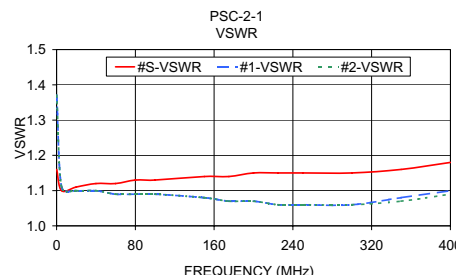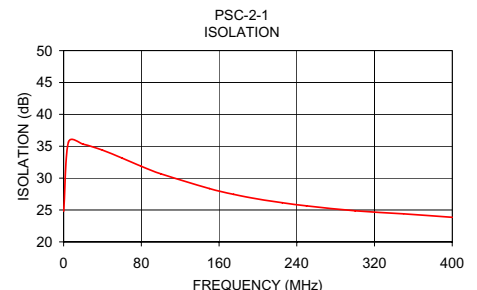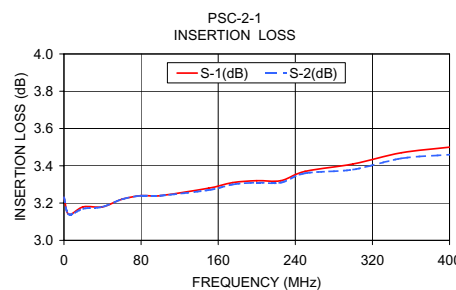

electrical schematic

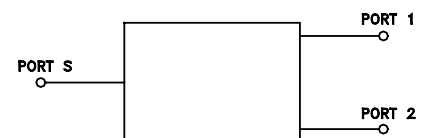

Mini-Circuits
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. A
M98898
PSC-2-1
HY/TD/CP
070202